



Compact, connected and convenient: Reliability and great performance for your business

RMB 22 - 37 kW, RMB IVR 22 - 37 kW
FIXED SPEED & VARIABLE SPEED



mark-compressors.com



RMB 22-37 Gear driven

RMB 22-37 IVR Direct driven



Compressed air drives your company. Consequently, choosing the right compressor is crucial. Going for our RMB and RMB IVR ranges of highly efficient and flexible oil-injected screw compressors is a choice you will not regret. Bring some fresh air into your company and enjoy the strong performance and high efficiency that come with it.

The new RMB IVR closely follows the air demand by automatically adjusting the motor speed. Combined with the innovative design of direct driven transmission, this results in average energy savings of 35% and an average cut of 25% in the lifecycle cost of a compressor.



OPTIONAL AND STANDARD FEATURES

OPTIONS LIST	Factory	Sales
OIL 8000H	✓	✗
CANOPY HEATER	✓	✓
FOOD GRADE OIL	✓	✗
OPTION ENERGY RECOVERY	✓	✓
HEAVY DUTY INLET FILTER	✓ std on 30 and 37 kW	✓ std on 30 and 37 kW
COALESCENCE FILTER OPTION 1 ppm residual oil content	✓ (with dryer)	✓ (with dryer)
WATER SEPARATOR DRAIN (WSD) + automatic drain	✓	✓
PHASE SEQUENCE RELAY	std	std
TROPICAL THERMOSTAT	std	std
WOODEN PACKAGE	✓	✗
ES4000 Touch controller	✓	✓
Main isolator SWITCH	✓	✗
Silencing baffle	✓	✓

✓ = available
✗ = not available

USER BENEFITS

Simple Installation

- Compact and all in one system, thanks to the oversized integrated dryers. Compressed air quality can be improved by the cyclonic water separator and the coalescent filter is available as an option.
- Innovative design
- Easy and fully protected transport
- No special foundation needed

Solid Quality

- Outstanding and first-class components:
- Highly reliable transmissions, for a quiet and trouble-free operation.
 - High capacity oil/air coolers, perfect air filtration and cooling guarantee less thermal shocks and a longer lifetime.
 - Overload protection and full automatic control.
 - High quality and heavy duty motor.

Saving of costs

- Lower energy consumption thanks to IE3 motors or IVR technology
- Optimal efficiency, lubrication and cooling
- Long service intervals

Easy Maintenance and Accessibility

- All service components are located at the front of the machine for excellent accessibility, you just have to open the frontal door for an easy access for service or cleaning, easy access of the coolers, oil filter, separator and air filter replacements.
- Oil-level eye at the front
- Easy and quick check thanks to service door and controller
- Service and cleaning is a one person job

Safety

- Emergency stop
- Protection grid
- IP 54 electrical cubicle
- Internal and external protection for the electric fan.

SMART TECHNICAL ADVANTAGES

Customize your machines through a wide range of options:

- Energy recovery to recover energy and reduce your energy bill
- Canopy heaters for low temperature installation



ES 4000 Swipe & Touch

All IVR models with ES4000 Touch and fix speed models with ES4000 swipe. (Touch as option for fix speed models.)



The energy cutter:

The new direct driven IVR version grants very low specific energy requirements and one of the widest turndowns of its category.



Very big air oil cooler and optimized air flow

Grant a very efficient cool down. Standard filtration panel extending service intervals. Air and oil filters and the oil vessel are easy to reach from the main door making serviceability very easy and fast.

YOUR ENERGY EFFICIENT AND SOLID PERFORMANCE

RMB 22 - 37 gear driven

RMB 22 - 37 IVR direct driven



- | | |
|------------------------------|------------------------------|
| 1 Cooling air filter | 9 Air end |
| 2 Emergency stop | 10 Motor |
| 3 Controller | 11 Fan motor |
| 4 Oil separator (30 - 37 kW) | 12 Gear box (FS) |
| 5 Oil separator (22 - 26 kW) | 13 Direct transmission (IVR) |
| 6 Electrical cubicle | 14 Water separator drain |
| 7 Converter | 15 Coalescent filter |
| 8 Air filter | 16 Dryer |



ICONS

Increased uptime, powered by ICONS

With the Intelligent CONnectivity System (ICONS), you get data and insights from your machines delivered to your computer, tablet or smartphone.

- Increase the reliability of your machine by identifying problems before they become a threat to the continuity of your production.
- Analyze and optimize your energy consumption and CO₂ emissions.
- Receive high-quality energy reports ensuring the ISO50001 compliance of your site.



TECHNICAL DATA

Fixed speed

Fixed speed	Max. Working pressure ***	Reference working pressure	Motor power		Free air delivery @ reference conditions*			Noise level **	Cooling air flow	Weight (kg)	
Model	BAR	BAR	kW	hp	m ³ /h	l/s	cfm	dB(A)	m ³ /h	FM	FM D
RMB 22*	7.5	109	22	30	232	65	137	68	2300	445	520
	8.5	123			219	61	129				
	10	145			199	55	117				
	13	189			172	48	101				
RMB 26	7.5	109	26	35	271	75	160	69	4800	460	535
	8.5	123			258	72	152				
	10	145			236	66	139				
	13	189			205	57	120				
RMB 30	7.5	109	30	40	328	91	193	70	4800	560	681
	8.5	123			300	83	177				
	10	145			275	76	162				
	13	189			240	67	141				
RMB 37	7.5	109	37	50	367	102	216	71	4800	623	744
	8.5	123			339	94	199				
	10	145			304	84	179				
	13	189			275	76	162				

* Available only 400 V 50Hz - IEC - CE

TECHNICAL DATA


Variable speed

Variable speed	Min. working pressure	Max. working pressure	Motor power		Free air delivery @ reference conditions *										Noise level **	Cooling air flow	Weight (kg)	
					Min FAD *					Max. FAD *								
					7 bar		7 bar		8.5 bar	9.5 bar		12.5 bar						
Model	Bar / PSI	Bar / PSI	kW	hp	m³/h	l/s	m³/h	l/s	m³/h	l/s	m³/h	l/s	m³/h	l/s	dB(A)	m³/h	FM	FM D
RMB 22 IVR*	5.5-80	13-188	22	30	46	13	250	69	243	68	211	59	176	49	68	2300	434	503
RMB 26 IVR	5.5-80	13-188	26	35	46	13	290	81	277	77	247	69	205	57	69	4800	444	513
RMB 30 IVR	5.5-80	13-188	30	40	60	17	348	97	327	91	289	80	243	68	70	4800	492	607
RMB 37 IVR	5.5-80	13-188	37	50	64	18	380	106	360	100	325	90	265	74	71	4800	514	629

* Available only 400 V 50Hz - IEC - CE

DIMENSIONS

Dimensions				
Model	Width (mm)	Height (mm)	Length IVR (mm)	Length IVR + dryer (mm)
RMB 22	830	1555	1320	1320
RMB 26				
RMB 30				1810
RMB 37				

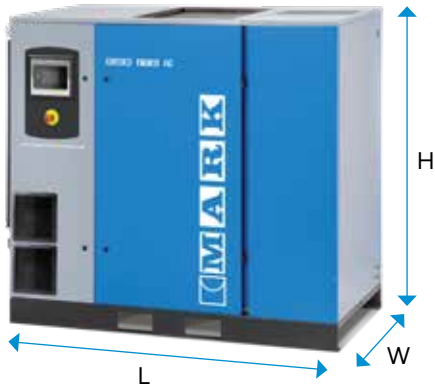

Contact your local representative:
www.mark-compressors.com

noesberger

Noesberger Drucklufttechnik AG
Noesberger technique en air comprimé SA
Tasberg 35, 1717 St. Ursen | St Ours
026 322 22 77 | www.noesberger.swiss
dlt@noesberger.swiss



CARE

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

TRUST

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

EFFICIENCY

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.

MARK reserves the right to change or revise specifications and product design in connection with any features of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped. © 2024 MARK. All rights reserved.

MARK

6999200362